




## Bearing equipment manufacturing Co., Ltd

### 20 mm x 27 mm x 4 mm NTN 6704LLF deep groove ball bearings

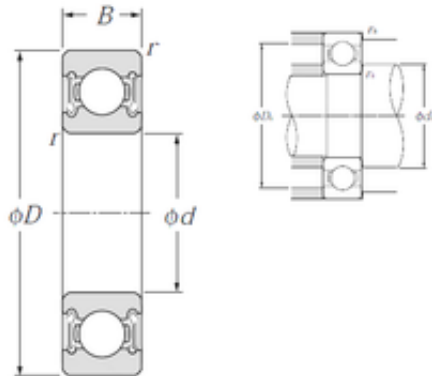

Bearing No. 6704LLF

Size	20x27x4 mm
Bore Diameter	20 mm
Outer Diameter	27 mm
Width	4 mm
d	20 mm
D	27 mm
B	4 mm
C	4 mm
r min.	0,2 mm
da min.	21,6 mm
da max	22,3 mm
Da max.	25,4 mm
ra max.	0,2 mm
Weight	0,0045 Kg
Basic dynamic load rating (C)	1,04 kN
Basic static load rating (C0)	0,73 kN
(Grease) Lubrication Speed	5 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359793468
Product Group	B00308
Enclosure	2 Seals

6704LLF Bearing 2D drawings and 3D CAD models



## Bearing equipment manufacturing Co., Ltd

Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	20MM Bore; 27MM Outside Diameter; 4MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; N
Other Features	Deep Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6704LLF
Outside Diameter	1.063 Inch   27 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Bore	0.787 Inch   20 Millimeter
Outer Race Width	0.157 Inch   4 Millimeter
bore diameter:	20 mm
static load capacity:	730 N
outside diameter:	27 mm



## Bearing equipment manufacturing Co., Ltd

precision rating:	ISO Class 0
overall width:	4 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Stainless Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	4 mm
snap ring included:	Without Snap Ring
outer ring width:	4 mm
internal clearance:	CN
maximum rpm (grease):	5000 rpm
operating temperature range:	-40 to 140 ° C
fillet radius:	0.2 mm
dynamic load capacity:	1040 N
manufacturer product page:	<a href="#">Click here</a>