




Bearing equipment manufacturing Co., Ltd

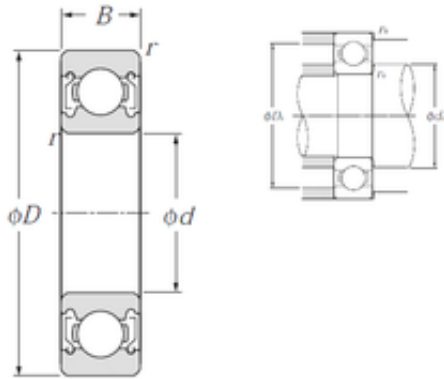

95 mm x 200 mm x 45 mm NTN 6319ZZ deep groove ball bearings

Bearing No. 6319ZZ

6319ZZ Bearing 2D drawings and 3D CAD models

Size	95x200x45 mm
Bore Diameter	95 mm
Outer Diameter	200 mm
Width	45 mm
d	95 mm
D	200 mm
B	45 mm
C	45 mm
rn	0,5 mm
r min.	3 mm
da min.	108 mm
da max	125 mm
Da max.	187 mm
ra max.	2,5 mm
Weight	5,67 Kg
Basic dynamic load rating (C)	153 kN
Basic static load rating (C0)	119 kN
(Grease) Lubrication Speed	3 300 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359006001
Product Group	B00308



Bearing equipment manufacturing Co., Ltd

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	95MM Bore; 200MM Outside Diameter; 45MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Other Features	Deep Groove Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	12.5
Outside Diameter	7.874 Inch 200 Millimeter
Bore	3.74 Inch 95 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	1.772 Inch 45 Millimeter
bore diameter:	95 mm
precision rating:	ISO Class 0
outside diameter:	200 mm



Bearing equipment manufacturing Co., Ltd

finish/coating:	Uncoated
overall width:	45 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	45 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	45 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	3300 rpm
internal clearance:	CN
fillet radius:	3 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	3900 RPM
dynamic load capacity:	153000 N
series:	63
static load capacity:	119000 N
manufacturer product page:	Click here